



WAREMA International GmbH
 Hans-Wilhelm-Renkhoﬀ-Str. 2
 97828 Marktheidenfeld • Germany
 Fax: +49 9391 20-3899
 www.warema.com · orders@warema.com

The General Terms and Conditions of the WAREMA company responsible for you apply. The [General Terms and Conditions](#) can be viewed on the Internet and downloaded from there. The order is based on these General Terms and Conditions in the contract.

Our products are custom-made items and therefore cannot be exchanged or returned.



Attention!
 Repeat
 (E-mail/fax)

Customer no.					Order date					Orderer					Delivery date					Offer number					Different delivery address, contact and telephone										Project order number									

Customer name: _____

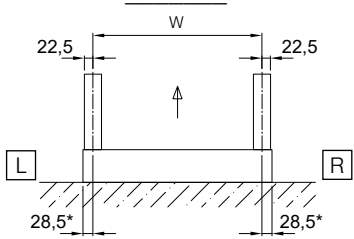
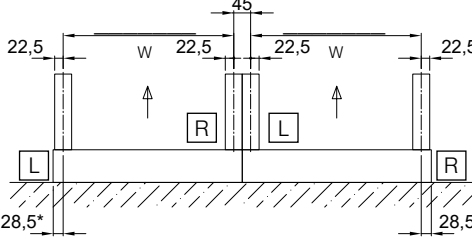
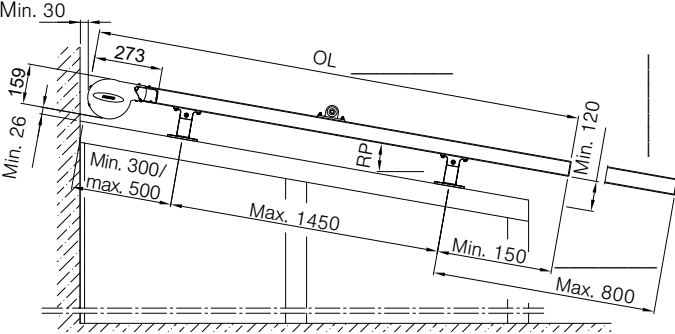
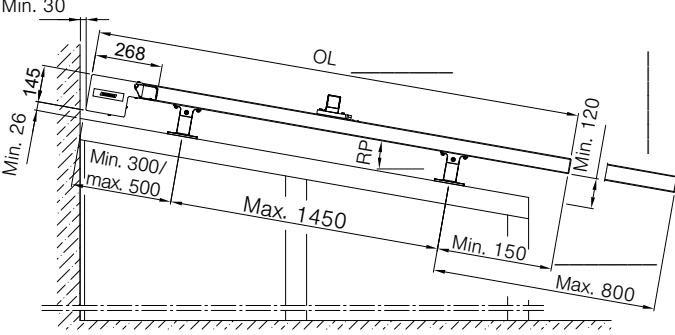
Reference: _____

Notes	
-------	--

Order form for conservatory awnings Climara W20

The current technical data apply. Order data: all specifications are in the extension direction. All dimensions are order dimensions in mm. The standard model will be used wherever details are not filled in!
 Order width = middle of guide rail to middle of guide rail. The complete awning (incl. side covers) is 57 mm wider.

Note: When using **above a fan wing** (no smoke and heat extraction system), an SDO switch integrated in the awning is required.

Individual unit Piece(s) _____  <p>*) Dimension incl. side cover</p>		Series-mounted unit Piece(s) _____ 		Order length (OL) <input type="checkbox"/> Round cover panel ⁴⁾ 	
Installation on⁴⁾ <input type="checkbox"/> Wood <input type="checkbox"/> Wood with hanger bolt <input type="checkbox"/> Aluminium <input type="checkbox"/> On-site bolt M8 <input type="checkbox"/> _____		Direction of movement <input type="checkbox"/> "From bottom to top" Roof pitch (RP) _____ °		Protection of unit against rain (required for 3...16° roof pitch) <input type="checkbox"/> On-site control, incl. precipitation sensor <input type="checkbox"/> Drainage cutouts in fabric (possible for 3...16°) The positioning of the cutouts depends on whether the fabric can rest on a substructure (rafters, glass, ...). Please specify.	
Colour specifications Colour number _____ Surface ²⁾ _____		Substructure present <input type="checkbox"/> Yes <input type="checkbox"/> No		Reinforcement profile <input type="checkbox"/> Fixed <input type="checkbox"/> Travelling (optional)	
Drive <input type="checkbox"/> Motor <input type="checkbox"/> WMS Radio motor ¹⁾ <input type="checkbox"/> EWFS Radio motor Piece(s) HHT basic/ 1-ch _____ Piece(s) WMS HHT plus (6-channel) _____ Piece(s) HHT comfort/8-ch _____ <input type="checkbox"/> WMS sensor system		Fabric connection (selectable only for Standard/Lumera/ and Perfora acrylic fabrics) <input type="checkbox"/> Sewing (standard) <input type="checkbox"/> Glue (surcharge)		Legend W Order width OL Order length RP Roof pitch L Left R Right	
Rect. cover panel ⁵⁾ 		Reinforcement profile round Ø40 to 3500 mm order width, reinforcement profile round Ø60 from 3501 mm order width ⁵⁾ From 2501 mm order length 1 reinforcement profile <input type="checkbox"/> 50 mm		Additional information: ¹⁾ WMS Hand-held transmitters can be programmed to the WMS Radio motor at the factory. Please note any details regarding this position separately. ²⁾ If no information is provided about the surface, the standard defined in the WAREMA Colour World will be supplied. ³⁾ Indicate the outside colour for two-colour designs. ⁴⁾ From 2501 mm order length 1 reinforcement profile,	

